BLUESKY
ENERGY TECHNOLOGY

BLUESKY
ENERGY TECHNOLOGY

WENZHOU BLUESKY ENERGY TECHNOLOGY CO.LTD
Add:No.379 Binhai 22nd Road ,Binhai ETDZ, Wenzhou, ZheJiang, China
Tel: +86-577-88609858
Fax:+86-577-88608078
Mob:+86- 17336216829
Whatapp / Telegram: + 86-17336216829
Email:Lydia @blueskynewenergy.com

Follow us on Linkedin/ Facebook/Wechat can get free gifts

RT-C Series

COMPANY PROFILE

As a professional producer of gas station equipment in China since 1997, we–Wenzhou BlueSky Energy Technology Co., Ltd. offers customers a turnkey solution for petroleum, LPG, CNG, LNG gas stations, and EV Charger stations. Also a complete line of fuel dispensers, LPG, CNG, and LNG dispensers. and pump management system, IC card retail automation system, tank gauging system, and many spare parts for the gas station.Our company is staffed with highly qualified technical professionals and management officials of high caliber. We have been focusing on quality management while seeking technological advancement. We have always focused on quality, environment, and occupational health, and established a management system in accordance with ISO9001, ISO14001, and ISO18001And we have 3 developing teams for technology updates to satisfy different customers' requirements. Our company is a member of PEI, our product has already been exported to many countries, like Europe, Asia, Africa, and South America. Our quality is guaranteed, and our price is attractive and competitive. All our exports meet the international standard of advanced technology with an optimized price–performance ratio.We hope, more and more friends and clients in Europe, Asia, Africa, and South America offer us more advice and make friends with all people in the field of petroleum and gas equipment.

CERTIFICATE

ISO

PEI

FUEL DISPENSER–MID

FUEL DISPENSER–PCEC

LPG DISPENSER–MID

LPG DISPENSER–PCEC

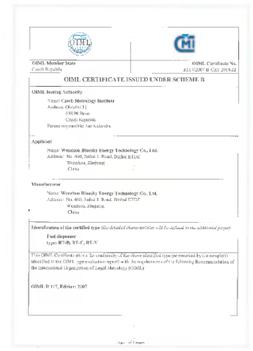

FUEL DISPENSER–OIML

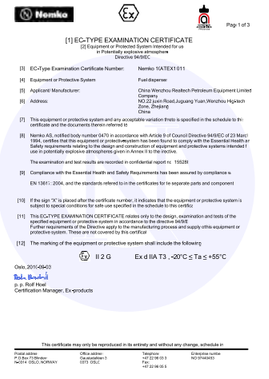

FUEL DISPENSER–ATEX

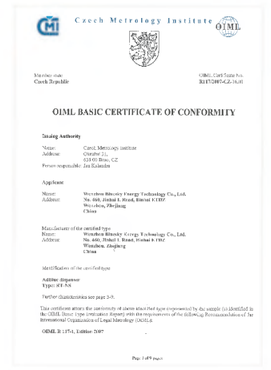

ADBLUE DISPENSER–OIML

Diagram

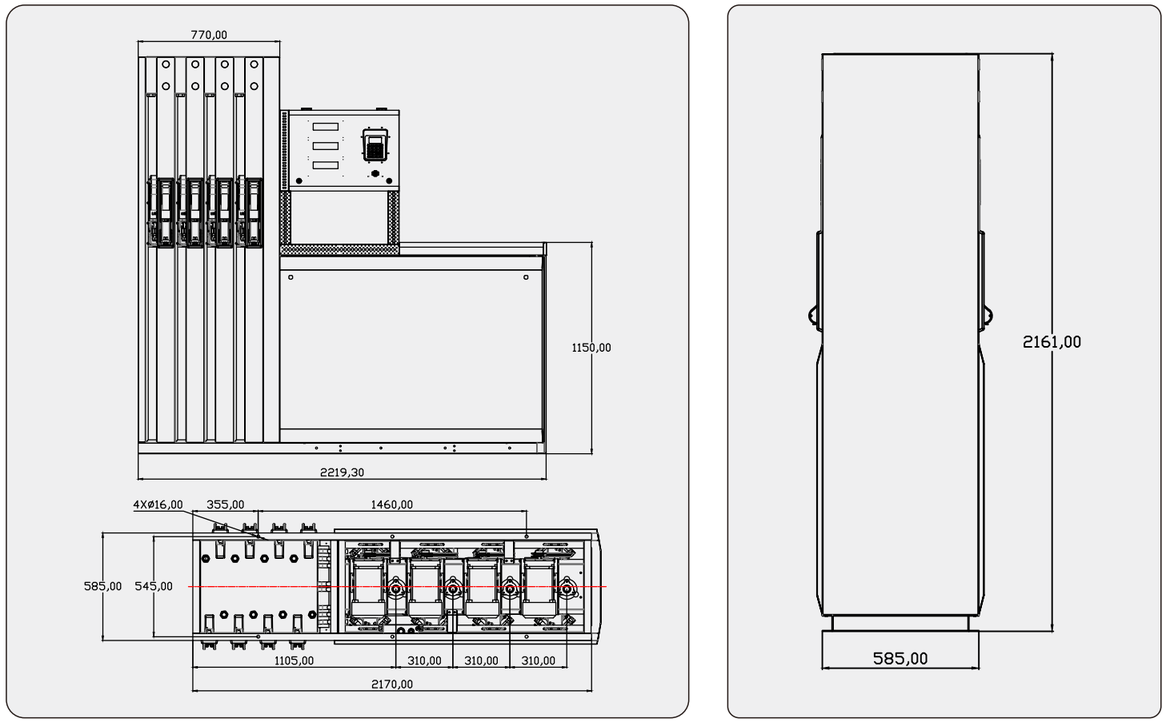

Main Technical Parameters:

Accuracy	±0.30%
Repeating accuracy	≤0.10%
Flow range	(5~55) L/min
Maximum head	5m
Inlet vacuum	≥54kPa
Outlet vacuum	≤0.3MPa
Work pressure	< 300 kPa
Noise	≤70dB(A class)
Input hose diameter	1½"
Oil hose diameter	3/4"
Motor power	0.75KW
Ambient temperature	-40℃~55℃
Humidity	≤95%
Atmospheric pressure	86kPa~106kPa
Unit Price range	0~9999(664), 0~999999(886)
Single range	1~9900.00(664),1~999900.00(886)
Accumulative range	0~9999999999.99
Power(optional)	AC110V, AC220V, AC380V/(50-60)Hz
EX Marking	Ex d ib mb ⅡB T3 Gb
Ex Certificate No.	CE14.5013

RT-C Series

Size：2219.3*585*2161mm（Length*Thickness*Height）